




Fibre Optic Cable

Multi Loose-Tube Microduct 12B Air Blown Cable

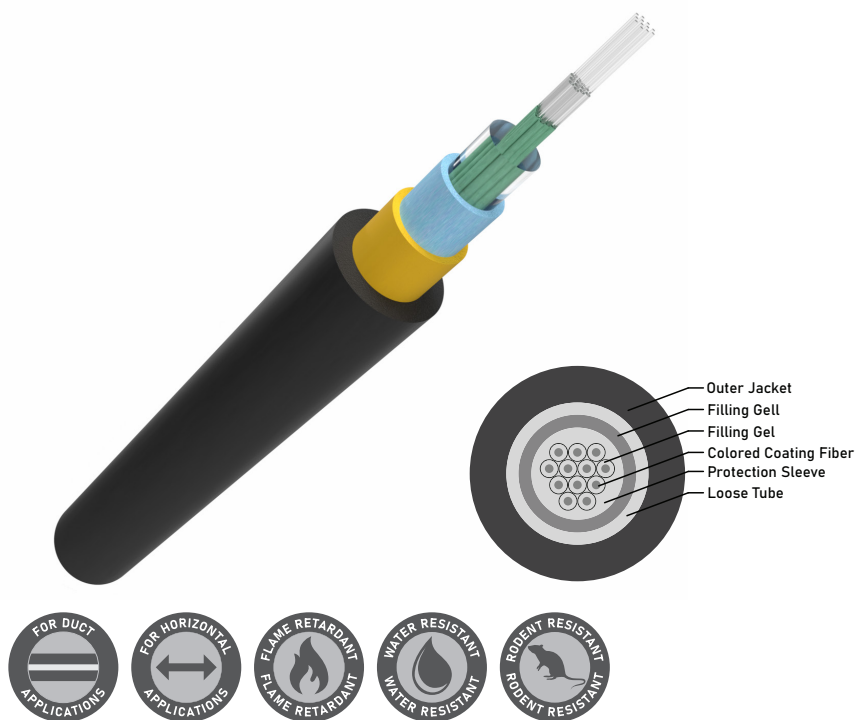

Product Description

Briticom® offers a wide range of indoor and outdoor fibre optic distribution, patching and consumer cables including Plenum, Riser and LSZH in all diameters. These are used to provide links to protocols such as FTTH, FDDI, 10 Gigabit Ethernet, ATM.

Features & Benefits

- 2-24 FO
- Outer sheath (HDPE, Black)
- Multi loose-tube microduct
- Air blown
- Outdoor use
- Available in many colours

Applications

- Telecommunication networks
- CATV - Cable television
- Fibre-To-The-Home (FTTH)

Items	Unit	Specifications
Tension (Long Term)	N	60
Tension (Short Term)	N	150
Crush (Long Term)	N/10cm	100
Crush (Short Term)	N/10cm	300
Min. Bend Radius (Dynamic)	mm	20D
Min. Bend Radius (Static)	mm	10D
Installation Temperature	°C	-20~ +60
Operating Temperature	°C	-40~ +70
Storage Temperature	°C	-40~ +70

To Order

Ordering information on page number 2



Fibre Optic Cable

Multi Loose-Tube Microduct 12B Air Blown Cable

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Items		Specifications
Fiber Count		12
Colored Coating Fiber	Dimension	250µm±15µm
	Colour	Blue, Orange, Green, Brown, Gray, Natural, Red, Black, Yellow, Purple, Pink, Aqua
Loose Tube	Dimension	1.8mm±0.1mm
	Material	PBT
	Color	Natural
Strength Member		Aramid yarns
Outer Jacket	Dimension	2.5mm±0.2mm
	Material	HDPE
	Colour	Black
Tube	No of Jackets	Material
*Leave blank if not required		

Example Part Number	
Description	Part Number
Multi Loose-Tube Microduct 12B Air Blown Cable	

To Order

To place an order, use the contact details below.