

Copper Structured Cabling

Empty Patch Panel UTP Flat 24 Port Modular 1U - Model 02

Product Description


Briticom® professional 24-port flat UTP patch panel offers a perfect solution for simple, high density applications.

Features & Benefits

- Only compatible with standard UTP/STP keystone jacks
- Screen printed labeling
- Rear bar for tidy cable management
- 24 modular KSJ ports
- Also available in 2U, 0.5U, and with shutters
- ANSI/TIA-568-C.2 Standard of 2009
- ANSI/TIA-568.0-D Standard of 2017

Applications

- Data and server racking
- Cat 5E, Cat 6 and Cat 6A RJ45 jacks
- Data centres
- LAN installations

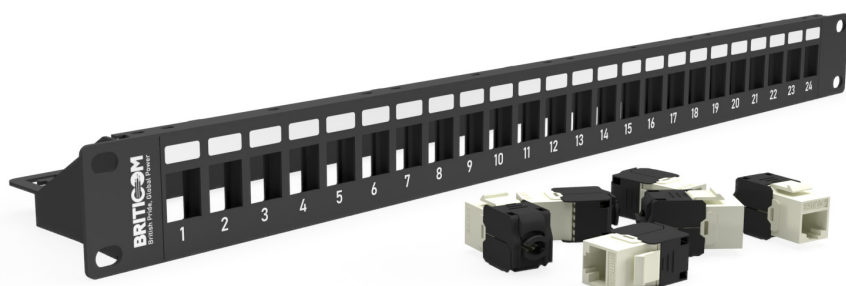



Technical Specifications

Norms	ISO/IEC 11801 3rd Ed., EN 50173-1, ANSI/TIA-568-C.2, ANSI/TIA-568.0-D
Housing Material	1.5 mm SPCC cold rolled steel sheet, powder-coated
Material Standard	EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, ASTM, SAE, NFA 36/401
Grounding	Central ground connection
Operation Temperature	-20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA-568-C.2, ANSI/TIA-568.0-D)

To Order

Ordering information on page 2.



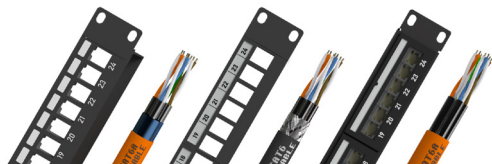

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Empty		Product		Colour		Model	
EM	Empty	KSF	KSJ Flat	BLK	Black	01	Model 01
		KFS	KSJ Flat Shuttered			02	Model 02
▲		▲		▲		▲	
EM	UTP	KSF	24	BLK	1U	02	
▼		▼		▼			
UTP (UTP)	UTP	1-24	1-24	1 Unit	1U		
STP (STP)	STP	24	24	2 Unit	2U		
				0.5 Unit	0.5U		
Construction		Port Density		Unit			

*Leave column blank if empty, fibre management or adapters only.

Example Part Number	
Description	Part Number
1U 19" 24 Ports Keystone Jack Flat Panel STP - Black - Model 02	EMUTPKSF24BLK1U02

To Order

To place an order, use the contact details below.