




Motor-Pump Unit for Waterflow

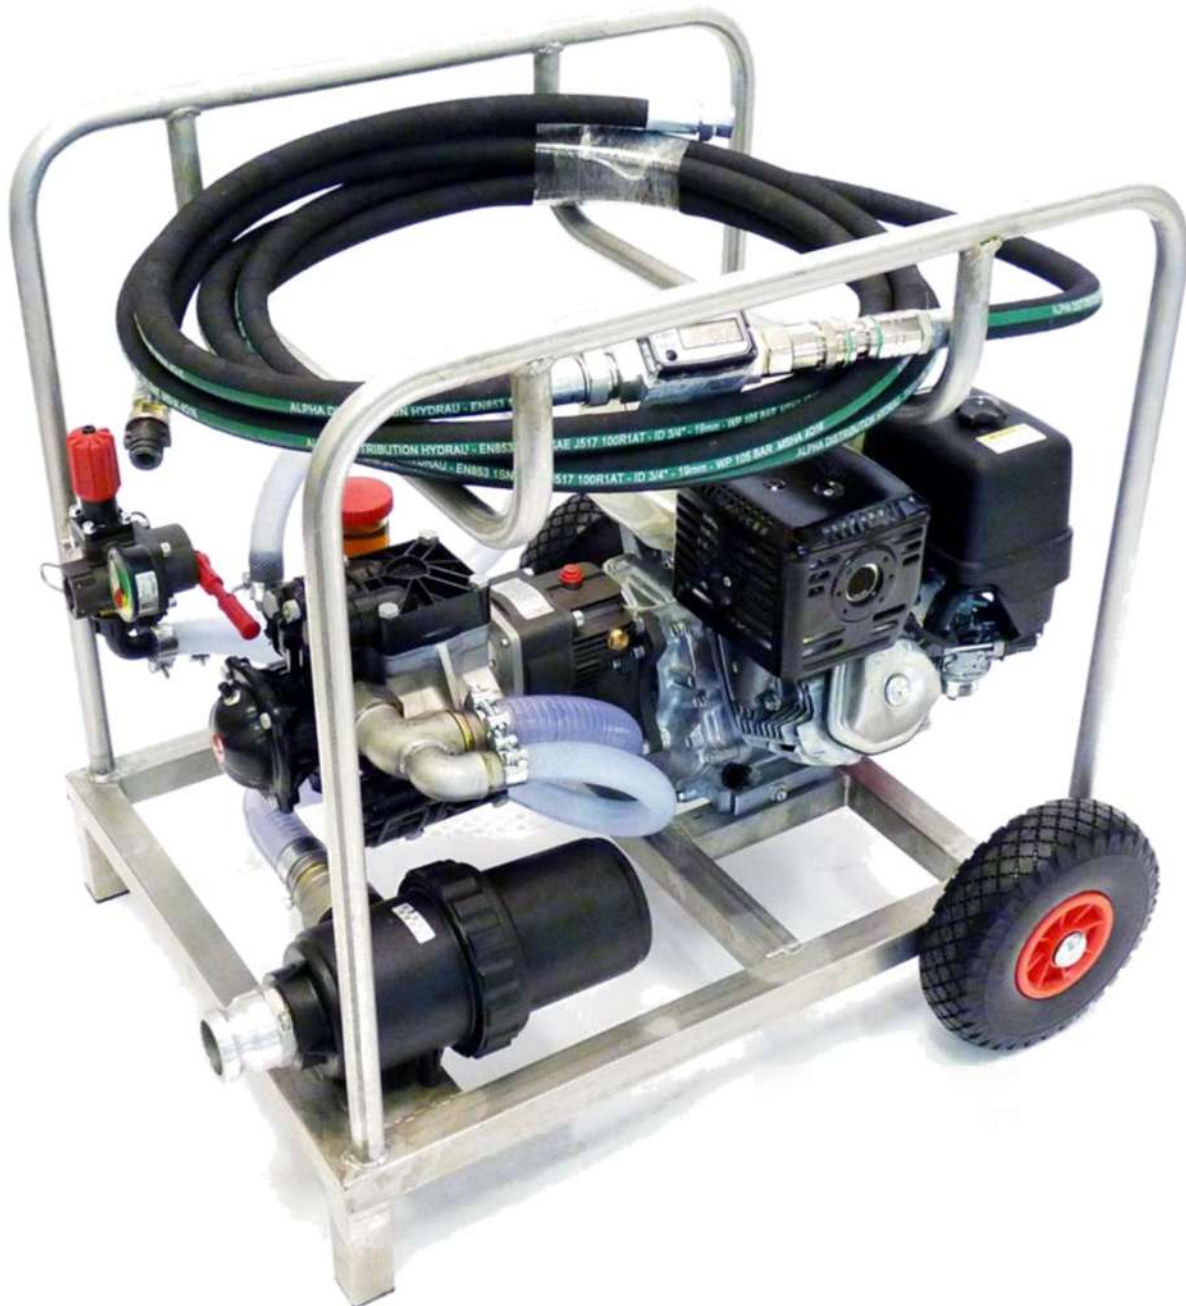

SPECIALLY DEDICATED TO OUR FIBER OPTIC BLOWING MACHINE

The motor-pump is intended for the laying of underground fiber optic telecommunication cables by waterflow blowing machines.

The flow of pressurised water inside the tube combined with our fiber optic blowing machine allow cable installation very easily and safely.



The motor-pump unit is CE approved. It provides the waterflow necessary to carry the optical fiber over a length of up to approximately 6 km, depending on the configuration of the civil engineering.

Mounted on a tubular stainless steel frame, it is also equipped with silent block and puncture-proof tires.




Overall dimensions (W x H x W) $\approx$ 850 x 835 x 840 mm
Weight $\approx$ 100 kg

We provide assistance and full training before and after sales / warranty period



* The nominal motor power indicated above is the net output power tested on a series engine of this model and measured in accordance with SAE J1349 at 3,600 rpm (net power) and 2,500 rpm (torque net max)



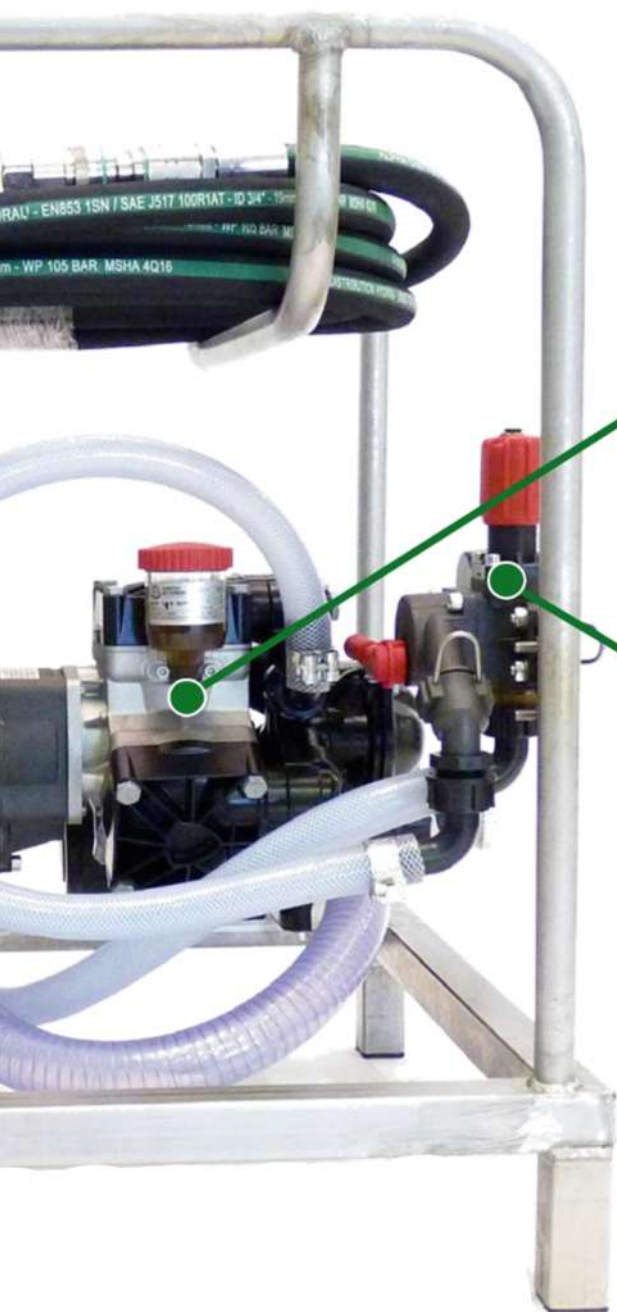


WATER MOTOR PUMP
max pression 20 bars



WATER PUMP CONTROLLER

HOSE STORAGE CRADLE

protects and promotes transport

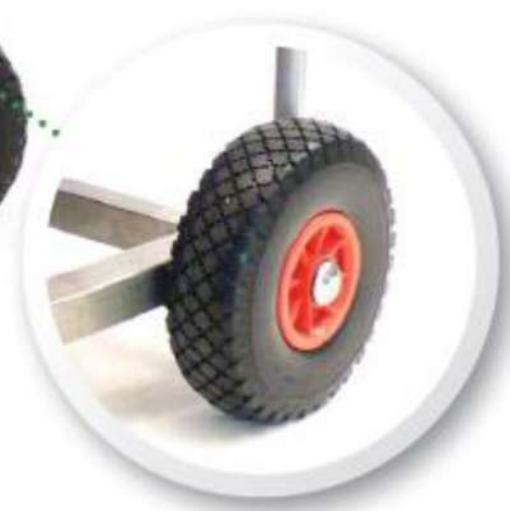

PUNCTURE-RESISTANT TIRE
WITH FLEXIBLE TIRE ON
STAINLESS STEEL CHASSIS



SUCTION PROTECTION FILTER

HIGH QUALITY WATER MOTOR PUMP ACCESSORIES



HOSE STORAGE CRADLE

fitted with a ball quick connector, connection
to the pump control and the flow meter



SUCTION PIPE

with quick coupling with ears fitted with a
valve strainer



1000 LITRE DEDICATED WATER TANK

- ≈ 56.0 kg and ≈ 120 x 116 x 100 cm (W x H x W overall)
- › Aluminum structure offering good longevity
- › Drain valve and connector for connecting another tank
- › Upper opening for suction hose strainer



CARTRIDGE FOR SUCTION PROTECTION FILTER