

Copper Structured Cabling

Cat 6a Patch Cord – U/UTP



Product Description

Briticom® category 6A unshielded U/UTP patch cords are designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards, including ANSI/TIA-568-C.2:2009 and ANSI/TIA-568.0-D:2017.

This delivers Class FA link and channel performance supporting all applications detailed and proposed within the standards. This superior performance cable is ETL component verified.

Features & Benefits

- 500 MHz with over 10Gbps
- ANSI/TIA-568-C.2:2009
- ANSI/TIA-568.0-D:2017
- 25-year warranty
- Unshielded
- LSZH, PVC or PE jacket
- Available in different colours & lengths
- Durable for 750 insertion cycles

Applications

- Data centres
- Telecommunication networks
- LAN applications
- CATV - Cable television
- CCTV


Technical Specifications

Conductor	Stranded AWG 27/7 bare copper, 0.127 ± 0.005 mm
Insulations	FO-PE (Foamed Polyethylene)
Overall Diameter	5.7 mm ± 0.30 mm
Bending Radius	15×OD
RJ45 Connector	3 µ nominal gold flash over 60 µ nickel undercoat contact pins
Wiring Standard	EIA/TIA 586B
Contact Resistance	30 mΩ maximum
Dielectric Strength	2500 VDC for 3 seconds
Uninsulated Resistance	150 MΩ/km minimum
NVP	76%
Flame Retardance, Smoke Emission	IEC 60332-1, IEC 61034
Typical Applications	IEEE 802.3: 10BASE-T; 100BASE-T; 1000BASE-T
Norms	ISO/IEC 11801-1; EN-50173; ANSI/TIA-568-C.2:2009, ANSI/TIA-568.0-D:2017; EN 60603-7-51, IEC 60603-7-5

To Order

Ordering information on page 2.



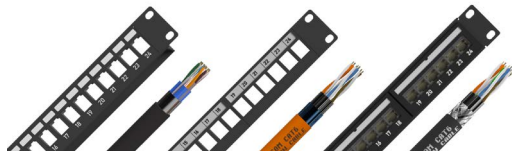

Copper Structured Cabling

Cat 6a Patch Cord – U/UTP

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Construction		Colour		Material		Standard	
UUTP	U/UTP	BLK	Black	HD	HDPE	-E	Extra Range
FUTP	F/UTP	GRY	Grey	PV	PVC	-P	Platinum
SFUTP	SF/UTP	WHT	White	LS	LSZH		
SFTP	S/FTP	ORN	Orange	LD	LDPE		
FFTP	F/FTP	GRN	Green	DJ	Double Jacket PE/		
UFTP	U/FTP	BLU	Blue	PE	PVC		
		RED	Red		Polyethylene		
		PRL	Purple				
▲		▲		▲		▲	
UUTP	C6A	GRY	1	LS		-P	
	▼		▼		▼		▼
Cat 5E	C5E	0.25m	.2	Flat	F	Outdoor	OD
Cat 6	C6	0.5m	.5	Angled Boot	A		
Cat 6A	C6A	1m	1	Locked	L		
Cat 7	C7	3m	3	Light	D		
Cat 8	C8	5m	5	Micro size	M		
		10m	10	Rodent Proof	R		
				Self-Tracing	S		
				Tangle-Free	T		
				Ultra-Flat	U		
Category		Length		Additional*		Outdoor**	

*Leave blank if no extra detail. **Leave blank if indoor.

Example Part Number	
Description	Part Number
Cat 6A U/UTP Patch Cord Grey 1m LSZH - Platinum	UUTPC6AGRY1LS-P

To Order

To place an order, use the contact details below.