



Voice

Connect/Disconnect Modules 10 Pairs

Product Description



Briticom® connect/disconnect modules provide a complete solution for voice, mid and low speed data transmission. These modules can be mounted on main distribution frames/cabinets or distribution boxes for use in connection of exchange lines and jumper wires.

Features & Benefits

- IDC connecting technology
- Suitable for use in all xDSL and ADSL 2+ circuits
- Flexible indoor and outdoor use
- Robust long-term stability
- Overvoltage protection
- Available in 10 pair
- Designation labelling system
- Compatible with KRONE LSA-PLUS modules
- Available with metal profile
- Other colours available

Applications

- Telecommunications
- LAN

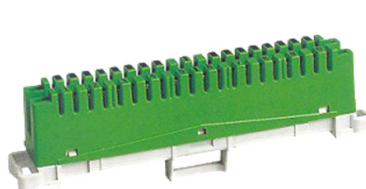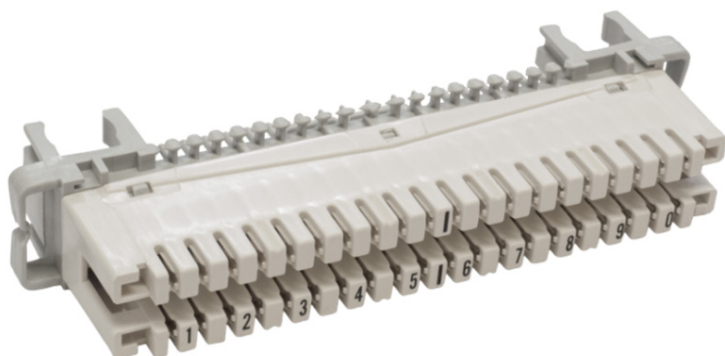

Technical Specifications

Insertion Life	250 cycles minimum
IDC Life	200 times (22-26 AWG solid wire) minimum
Material	PBT/ABS (UL94V-0)
Insulation Resistance	$\geq 1000\text{M}\Omega$
Contact Resistance	$< 7\text{M}\Omega$
Dielectric Intensity	DC 1200V, 60s no spark over and fly arc
Conductor Diameter	AWG 22-26 (0.4-0.63mm)
Contact Material	Brass - silver-plated
Operating Temperature	-10 to +60°C
Conformance	RoHS, EC European Directive 2002/96/EG

To Order

Ordering information on page 2.





Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product		Gel	
VCM VDM	Voice Connecting Module Voice Disconnecting Module	WG NG	With Gel Without Gel
▲		▲	
VCM	10P	WG	GRY
▼		▼	
10 Pairs 30 Pairs 50 Pairs 100 Pairs 200 Pairs 400 Pairs	10P 30P 50P 100P 200P 400P	Black Grey White	BLK GRY WHT
Pairs		Colour	

Example Part Number	
Description	Part Number
Voice Connecting Module 10 Pairs - Grey	VCM10PWGGRY

To Order

To place an order, use the contact details below.