

Copper Structured Cabling

Empty Patch Panel 24 Port - UTP with Auto Shutters - Model 02

Product Description


Briticom® professional 24-port flat patch panel offers a perfect solution for simple, high density applications. This product is fitted with Auto Shutters to protect contact points from dust and debris.

Features & Benefits

- Flat panel design
- Auto shutter for dust and debris protection
- Rear bar for tidy cable management
- 24 modular KSJ ports
- Also available in 2U, 0.5U, and with shutters
- ANSI/TIA-568-C.2 Standard of 2009
- ANSI/TIA-568.0-D Standard of 2017

Applications

- Data and server racking
- Cat 5E, Cat 6 and Cat 6A RJ45 modular keystone jacks
- Data centres
- LAN installations

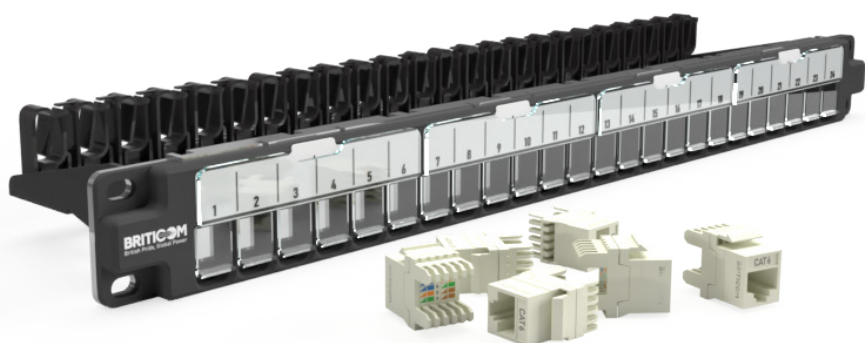


Technical Specifications

Norms	ISO/IEC 11801 3rd Ed., EN 50173-1, ANSI/TIA-568-C.2, ANSI/TIA-568.0-D
Housing Material	1.5 mm SPCC cold rolled steel sheet, powder-coated
Material Standard	EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, ASTM, SAE, NFA 36/401
Operation Temperature	-20° C to +70 °C

To Order

Ordering information on page 2.



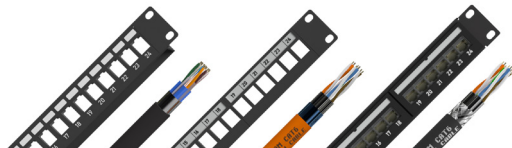

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Empty		Product		Colour	
EM	Empty	KSF	KSJ Flat	BLK	Black
▲		▲	KSJ Flat Shuttered	▲	
EM	UTP	KSF	24	BLK	1U
▼		▼		▼	
UTP (UTP)	UTP	1-24	1-24	1 Unit	1U
STP (STP)	STP	24	24	2 Unit	2U
				0.5 Unit	0.5U
Construction		Port Density		Unit	

Example Part Number	
Description	Part Number
1U 19" Empty Patch Panel 24 Port with Auto Shutters - Model 02 - Black	EMUTPKSF24BLK1U

To Order

To place an order, use the contact details below.