

Copper Structured Cabling

Empty Patch Panel Flat 48 Port Modular 2U



Product Description

Briticom® professional 48-port flat patch panel offers a perfect solution for simple, high density applications.

Features & Benefits

- Flat panel design
- Rear bar for tidier cable management
- 48 modular ports
- Earthing/grounding
- Also available in 1U, 0.5U
- Available with shutters
- ANSI/TIA-568-C.2 Standard of 2009
- ANSI/TIA-568.0-D Standard of 2017

Applications

- Data and server racking
- Cat 6A, Cat 6 or Cat 5E RJ45 modular jacks
- Data centres
- LAN installations


Technical Specifications

Norms	ISO/IEC 11801 3rd Ed., EN 50173-1, ANSI/TIA-568-C.2, ANSI/TIA-568.0-D
Housing Material	1.5 mm SPCC cold rolled steel sheet, powder-coated
Material Standard	EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, ASTM, SAE, NFA 36/401
Grounding	Central ground connection
Operation Temperature	-20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA-568-C.2, ANSI/TIA-568.0-D)
Size (mm)	483(w) × 44.5(h) × 95(d)

To Order

Ordering information on page 2.



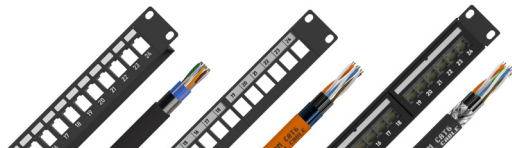

Copper Structured Cabling

Empty Patch Panel Flat 48 Port Modular 2U

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Empty		Product		Colour	
EM	Empty	KSF	KSJ Flat	BLK	Black
		KFS	KSJ Flat Shuttered		
▲		▲		▲	
EM	UTP	KSF	48	BLK	2U
▼		▼		▼	
UTP (UTP) STP (STP)	UTP STP	1-24 24 48	1-24 24 48	2 Unit 1 Unit 0.5 Unit	2U 1U 0.5U
Construction		Port Density		Unit	

Example Part Number	
Description	Part Number
2U 19" 48 Ports Keystone Jack Flat Panel UTP - Black	EMUTPKSF48BLK2U

To Order

To place an order, use the contact details below.