




Fibre Optic Cable

Horizontal Steel Tape Armoured Double Jacket Cable – FRP

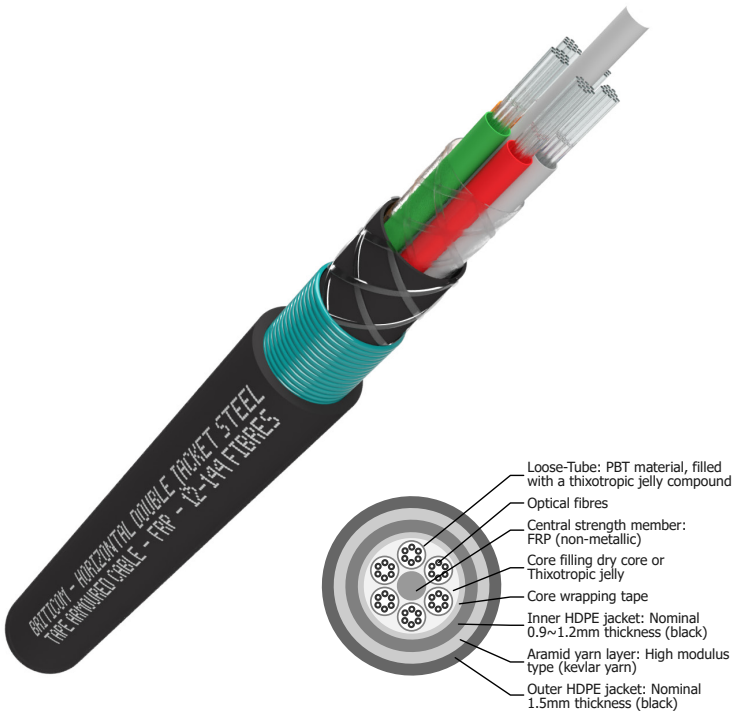

Product Description

Briticom® offers a wide range of indoor and outdoor fibre optic distribution, patching and consumer cables including Plenum, Riser and LSZH in all diameters. These are used to provide links to protocols such as FTTH, FDDI, 10 Gigabit Ethernet, ATM.

Features & Benefits

- FRP strength member
- Steel tape armoured – double jacket
- For outdoor use
- Water, flame and rodent resistant
- Available in many colours

Applications

- CATV - Cable television
- Fibre-To-The-Home (FTTH)
- ODFs to wall outlets, wall outlets to desk



Technical Specifications

Outer	PE or LSZH
Fibre Count	12 – 144
Outer Diameter (mm)	14.5 ± 0.5
Weight per km	215 kg
Max Tensile Strength (N)	1000 – 3000
Mini Bend Radius (mm)	120-340D
Max Crush Resistance (N/100mm2)	4500
Operating Temp. (°C)	-40 ~ 70
Standards	IEC 60794-1-1:2023 IEC 60794-4-30:2021 GR-20 Issue 4 IEC 60794 IEC fire/smoke standards ISO/IEC 11801-1, ITU-T G.652D/G.657xx

To Order

Ordering information on page 2.





Horizontal Steel Tape Armoured Double Jacket Cable – FRP

Use combinations of **bold** letters and numbers to create part numbers for ordering.

*Leave blank if not required

To Order

To place an order, use the contact details below.