



Cabinets & Racks

Modular LCD Console KVM Solution 16 RJ45 Port

Product Overview

Experience seamless control and flexibility with our Modular LCD Console KVM Solution, designed for efficient data center and server management. This space-saving, all-in-one unit integrates a high-definition display, keyboard, mouse, and multi-port KVM switch, offering superior usability and adaptability for diverse IT environments.



Monitor Specification

Type		18.47" Wide-Screen LCD Console	17.3" Wide-Screen LCD Console
LCD Monitor	Ratio	18.47" Screen, 16:9	17.3" Screen, 16:9
	Video	Wide AHVATFT-LCD	Wide AHVA TFT-LCD
	Visible Square	409.96(H) x 230.04(V)	381.888(H) x 214.812(V)
	Resolution	1920*1080 @60HZ	1920*1080 @60HZ
	Support Color	16.7M, True 8 bit	16.7M (RGB 6-bit data+ HiFCR data)
	Contrast	1000 : 1 (Typ)	600 : 1 (Typ)
	Back light	LED	
	Pixel Pitch	213*213um	0.1989(per one triad) x 0.1989
	LED MTBF	100,000 hours	
	Input power	12V	
Keyboard (demountable design)	Keyboard	100Keys, detachable (9 different languages for choose)	
	Compatible IBM/AT	Microsoft Windows9, Me/NT/2000/XP, WIN7, Server2003, WIN8, WIN10	
	Port	Standard PS/2; USB	
	Using life	> 1,000,000 Times	
Mouse	Type	Touch Screen	
	Port	Standard PS/2	
	X/Y Resolution	> 1000dots/inch, (40x40/mm)	
	Using life	> 1,000,000 Times	
Installation Dimension		407*445*45mm	
Weight		8.5kg	

To Order

Ordering information on page 2.






KVM Specification

Computer Connection	Direct Connects	16
	Maximum Connects	256
CPU Port Selection	OSD Menu, Front panel buttons, Hot Key, IP Remote Control (Optional)	
PC Connector	Monitor Keyboard/Mouse Switch Module	16 x RJ45
	Switch Module Port	2 x USB
	Power	1 x DC Jack
	Network Port	2 x RJ45
Key Switch	Connection Port Selection	KVM Operation Panel Digital keys
	KVM Reset	KVM Operation Panel Function Keys
	IP Module Reset	1 x semi-embedded key
	IP Module Default	1 x semi-embedded key
LED's	Selected	Nixie Tube LED Display
	Online	16 x Red
	IP Network	1 x Green, 1 x Orange
Analog Mode	Keyboard/Mouse	USB, PS/2
Resolution (Max)		1920 x 1200 @ 60HZ Local & Remote
Scan time interval		3, 5, 10, 15, 20, 30, 40, 60s (3s by default)
Operating Environment	Operating temperature	-10-50°C
	Storage temperature	-20-60°C
	Humidity	0-80%RH, No Condensation
Physical Properties	Housing	Metal
	Dimension	611*445*45mm
	Weight	10.5kg

Product Diagram

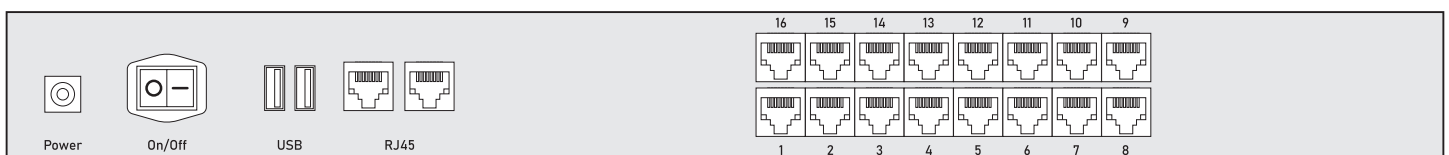

Ordering Information

Example Part Number	
Description	Part Number
KVM Switch 16 RJ45 Port with 17" LCD, with Keyboard and Mouse	KVMSW-16RJ-17LCD-KM
KVM Switch 16 RJ45 Port with 19" LCD, with Keyboard and Mouse	KVMSW-16RJ-19LCD-KM

To Order

To place an order, use the contact details below.