



BRITICOM

British Pride, Global Power



Cabinets & Racks

Modular LCD Console KVM Solution 8 RJ45 Port

Product Overview

Experience seamless control and flexibility with our Modular LCD Console KVM Solution, designed for efficient data center and server management. This space-saving, all-in-one unit integrates a high-definition display, keyboard, mouse, and multi-port KVM switch, offering superior usability and adaptability for diverse IT environments.



Monitor Specification

Type		18.47" Wide-Screen LCD Console	17.3" Wide-Screen LCD Console
LCD Monitor	Ratio	18.47" Screen, 16:9	17.3" Screen, 16:9
	Video	Wide AHVATFT-LCD	Wide AHVA TFT-LCD
	Visible Square	409.96(H) x 230.04(V)	381.888(H) x 214.812(V)
	Resolution	1920*1080 @60HZ	1920*1080 @60HZ
	Support Color	16.7M, True 8 bit	16.7M (RGB 6-bit data+ HiFCR data)
	Contrast	1000 : 1 (Typ)	600 : 1 (Typ)
	Back light	LED	
	Pixel Pitch	213*213um	0.1989(per one triad) x 0.1989
	LED MTBF	100,000 hours	
	Input power	12V	
Keyboard (demountable design)	Keyboard	100Keys, detachable (9 different languages for choose)	
	Compatible IBM/AT	Microsoft Windows9, Me/NT/2000/XP, WIN7, Server2003, WIN8, WIN10	
	Port	Standard PS/2; USB	
	Using life	> 1,000,000 Times	
Mouse	Type	Touch Screen	
	Port	Standard PS/2	
	X/Y Resolution	> 1000dots/inch, (40x40/mm)	
	Using life	> 1,000,000 Times	
Installation Dimension		407*445*45mm	
Weight		8.5kg	

To Order

Ordering information on page 2.






KVM Specification

Computer Connection	Direct Connects	8
	Maximum Connects	256
CPU Port Selection	OSD Menu, Front panel buttons, Hot Key, IP Remote Control (Optional)	
PC Connector	Monitor Keyboard/Mouse Switch Module	8 x RJ45
	Switch Module Port	2 x USB
	Power	1 x DC Jack
	Network Port	2 x RJ45
Key Switch	Connection Port Selection	KVM Operation Panel Digital keys
	KVM Reset	KVM Operation Panel Function Keys
	IP Module Reset	1 x semi-embedded key
	IP Module Default	1 x semi-embedded key
LED's	Selected	Nixie Tube LED Display
	Online	16 x Red
	IP Network	1 x Green, 1 x Orange
Analog Mode	Keyboard/Mouse	USB, PS/2
Resolution (Max)		1920 x 1200 @ 60HZ Local & Remote
Scan time interval		3, 5, 10, 15, 20, 30, 40, 60s (3s by default)
Operating Environment	Operating temperature	-10-50°C
	Storage temperature	-20-60°C
	Humidity	0-80%RH, No Condensation
Physical Properties	Housing	Metal
	Dimension	611*445*45mm
	Weight	10.5kg

Product Diagram

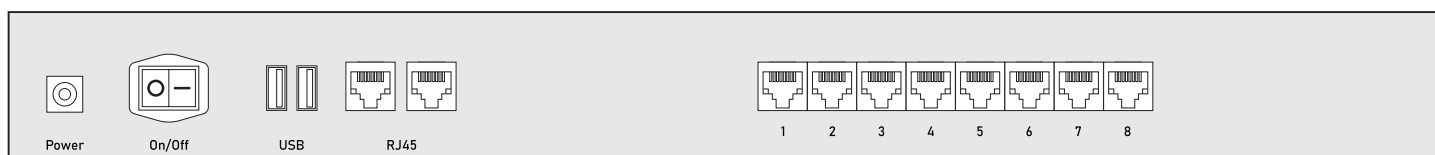

Ordering Information

Example Part Number	
Description	Part Number
KVM Switch 8 RJ45 Port with 17" LCD, with Keyboard and Mouse	KVMSW-8RJ-17LCD-KM
KVM Switch 8 RJ45 Port with 19" LCD, with Keyboard and Mouse	KVMSW-8RJ-19LCD-KM

To Order

To place an order, use the contact details below.