



Fibre Management

Outdoor Splicing Distribution Box
Metal – Model 02 – 24 FO

Product Description


Briticom® fibre optic distribution and termination boxes are used for the easy-access and distribution of fibre optic connections between networks.

Features & Benefits

- UV resistant
- 24 FO
- RoHS compliant materials
- Lockable door
- IP65 Rating

Applications

- Telecommunication networks
- LAN, MAN and WAN applications
- CATV - Cable television
- Fibre-to-the-Home (FTTH)

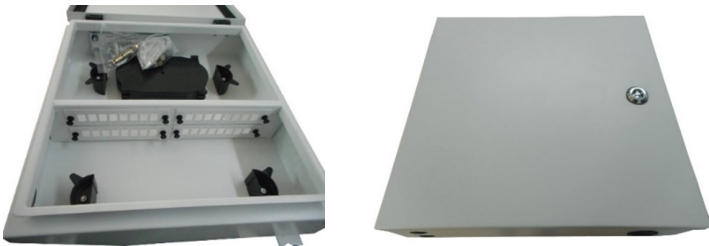

Technical Specifications

Material	SPCC cold-rolled steel
Dimensions	349.6x330x79.8mm
Max Capacity	24
Max Splice Tray Quantity	2pcs
Max Splice Tray Capacity	12 fibres

To Order

Ordering information on page 2.





Fibre Management

Outdoor Splicing Distribution Box Metal – Model 02 – 24 FO

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product (Box)		Material		Polish Type*		No of Fibres	
ITB	Indoor Terminal	P	Plastic	A	APC	01	1 Pieces
IDB	Indoor Distribution	M	Metal	U	UPC	02	2 Pieces
OTB	Outdoor Terminal					04	4 Pieces
ODB	Outdoor Distribution					06	6 Pieces
ISB	Indoor Splitter Box					08	8 Pieces
OSB	Outdoor Splitter Box					09	9 Pieces
DRB	DIN Rail Box						
⬆		⬆		⬆		⬆	
ODB	02	M	SC	U	SX	24	
⬇		⬇		⬇		⬇	
Model 1	01	SC	SC	Duplex	DX	Pigtails	/P
Model 2	02	E2000	E2	Quad	QD		
Model 3	03	MTP	MTP	Simplex	SX		
Model 4	04	FC	FC				
Model 5	05	ST	ST				
Model 6	06						
Model 7	07						
Model 8	08						
Model 9	09						
Model		Adapter Type		Capacity		Additional	

*Leave column blank if unloaded.

Example Part Number	
Description	Part Number
Outdoor SC UPC Simplex 24 FO Splicing Distribution Box – Metal – Model 02	ODB02MSCUSX24

To Order

To place an order, use the contact details below.