




Fibre Management

Outdoor Splicing Distribution Box Plastic – Model 07 – 08 FO

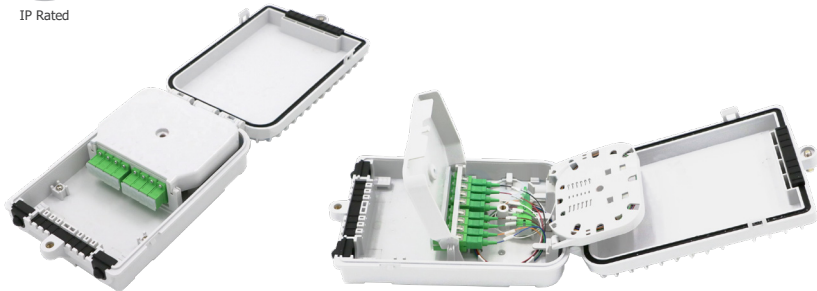

Product Description

Briticom® fibre optic distribution and termination boxes are used for the easy-access and distribution of fibre optic connections between networks.

Features & Benefits

- 08 FO
- Wall or pole mount
- 1:4 splitter (2pcs) / 1:8 splitter (1pc)
- Anti-UV, anti-impact and waterproof
- SC adapters
- IP54 rating
- RoHS materials

Applications

- Telecommunication networks
- LAN, MAN and WAN applications
- CATV - Cable television
- Fibre-to-the-Home (FTTH)

Technical Specifications

Material	ABS+PC
Dimensions	192x132x52mm
Colour	White
IP Rated	IP54
Max Splitting	1:4 (2pcs) / 1:8 (1pc)
Weight (kg)	0.5
Optical Fibre Radius of Curvature	≥30mm
Splice Tray Additional Loss	≤0.01dB
Working Temperature	-10℃~+60℃
Side Pressure	≥2000N/10 cm
Impact Resistance	≥20N.m
Cable Diameter (mm)	≤12mm
Inlet/Outlet	2 in 8 out
Fibre Core Capacity	8 (single fibre)

To Order

Ordering information on page 2.





Fibre Management

Outdoor Splicing Distribution Box Plastic – Model 07 – 08 FO

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Product (Box)		Material		Polish Type*		No of Fibres	
ITB	Indoor Terminal	P	Plastic	A	APC	01	1 Pieces
IDB	Indoor Splicing Distribution	M	Metal	U	UPC	02	2 Pieces
OTB	Outdoor Terminal					04	4 Pieces
ODB	Outdoor Splicing Distribution					06	6 Pieces
ISB	Indoor Splitter Box					08	8 Pieces
OSB	Outdoor Splitter Box						
DRB	DIN Rail Box						
⬆		⬆		⬆		⬆	
ODB	07	P	SC	U	SX	08	
⬇		⬇		⬇		⬇	
Model 1	01	SC	SC	Simplex	SX	Pigtails	/P
Model 2	02						
Model 3	03						
Model 4	04						
Model 5	05						
Model 6	06						
Model 7	07						
Model 8	08						
Model 9	09						
Model		Adapter Type		Capacity		Additional	

*Leave column blank if unloaded.

Example Part Number	
Description	Part Number
Outdoor SC SX UPC 08FO Splicing Distribution Box – Plastic – Model 07	ODB07PSCUSX08

To Order

To place an order, use the contact details below.