



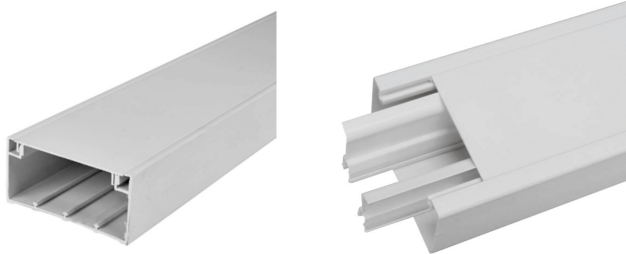

Cable Management

PVC Cable Trunking with Compartment

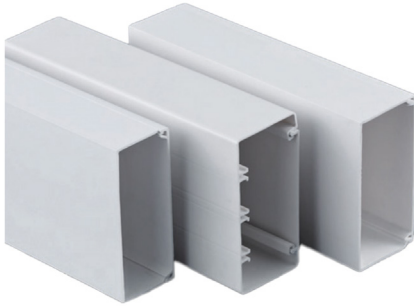

Product Description

With an array of lengths, thicknesses and compartments available, Briticom® PVC cable trunking is adaptable and suitable for a large variety of installations.

Features & Benefits

- Resistant to compression and impact
- Suitable to be buried in concrete
- Fix with adhesive and/or wall fixing
- Accessories attach to the base by snap-fastening
- Pre-drill in steps of 200 mm
- Horizontal or vertical assembly
- Available with or without adhesive
- For maintenance work, the cover can be easily removed using a screwdriver
- Covered with a protective film to protect the surfaces against scratches and dirt during installation
- Good insulation
- Able to resist 25KV voltage
- Low friction and high flow capacity
- Light weight, easy to cut, transport, bent and handle
- Self-extinguishing PVC profiles at 650°C

Applications

- Data centres
- Telecommunication networks
- LAN

Technical Specifications

Material	PVC
Diameter (Width × Height) × Length	Moulding 20 × 12 with 1 compartment × 150 m
	Moulding 25 × 16 with 1 compartment × 80 m
	Moulding 40 × 16 with 1 compartment × 50 m
	Moulding 60 × 16 with 2 compartment × 54 m

To Order

To place an order, use the contact details below.



Technical Specifications

Diameter (Width × Height) × Length	Moulding 20 × 12 with 1 compartment × 130 m with self adhesive
	Moulding 25 × 16 with 1 compartment × 80 m with self adhesive
	Moulding 40 × 16 with 1 compartment × 50 m with self adhesive
	Moulding 60 × 16 with 2 compartment × 54 m with self adhesive
Impact Resistance During Installation and Use	2.0 J
Minimum Storage and Transport Temperature	-25°C
Minimum Installation and Use Temperature	-5°C
Maximum Temperature Of Use	+60°C
IP Rating	IP40
Rated Voltage	500 V
IK Rating	IK 07
Quantity in Package	
20	Plinth 80 x 45 mm
16	Plinth 100 x 45 mm
8	Plinth 100 x 55 mm
8	Plinth 170 x 55 mm

80*45	100*45	150*55	170*55

To Order

To place an order, use the contact details below.