

Copper Structured Cabling

Cat 6a Patch Cord - U/FTP Flex-Guard Strain Relief Boots

Product Description

Briticom® Cat 6a U/FTP Flex-Guard Strain Relief Booted Patch Cord is ideal for use in environments where space is at a minimum and the bending of cables is required. The connection between the cable and connector is spring protected to avoid weakness and breakages, therefore the life of the cable is extended.

Designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards, including ANSI/TIA-568-C.2 Standard of 2009 and ANSI/TIA-568.0-D Standard of 2017.

Features & Benefits

- U/FTP 32 AWG stranded cable OD 3.8mm
- Small bend radius
- Armoured strain relief boots
- Fluke DSX8000 Channel Link tested at 20m
- Full protection of cable
- 2000+ bend lifespan
- ANSI/TIA-568-C.2 Standard of 2009
- ANSI/TIA-568.0-D Standard of 2017
- Available in 0.3m-20m length
- Also available in U/UTP 30AWG stranded cable with OD 3.2mm

Technical Specifications

Bandwidth	500MHz
Sheath	LSZH/PVC
Outside Diameter	3.8mm
Construction	U/FTP or U/UTP
AWG	32 AWG
Conductor	Stranded Copper
Frequency	10Gbps
Plug	RJ45 Plug
Certification	UL, CE, SGS, ISO9001, RoHS, REACH
Length	0.3m-20m
Boot Type	Moulded boot
Connector	RJ45 8P8C 3u-50u
Contacts	Brass, 3 prongs, 3u gold plating
Colour	Grey, Green, Red, Yellow, Black, Blue, White, Pink


Applications

- Data centres
- Smart home
- Office

To Order


Ordering information on page 2.



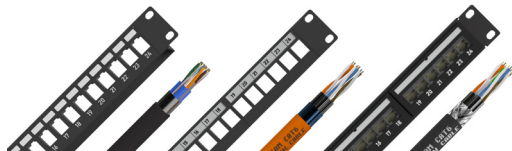

Copper Structured Cabling

Cat 6a Patch Cord - U/FTP Flex-Guard Strain Relief Boots

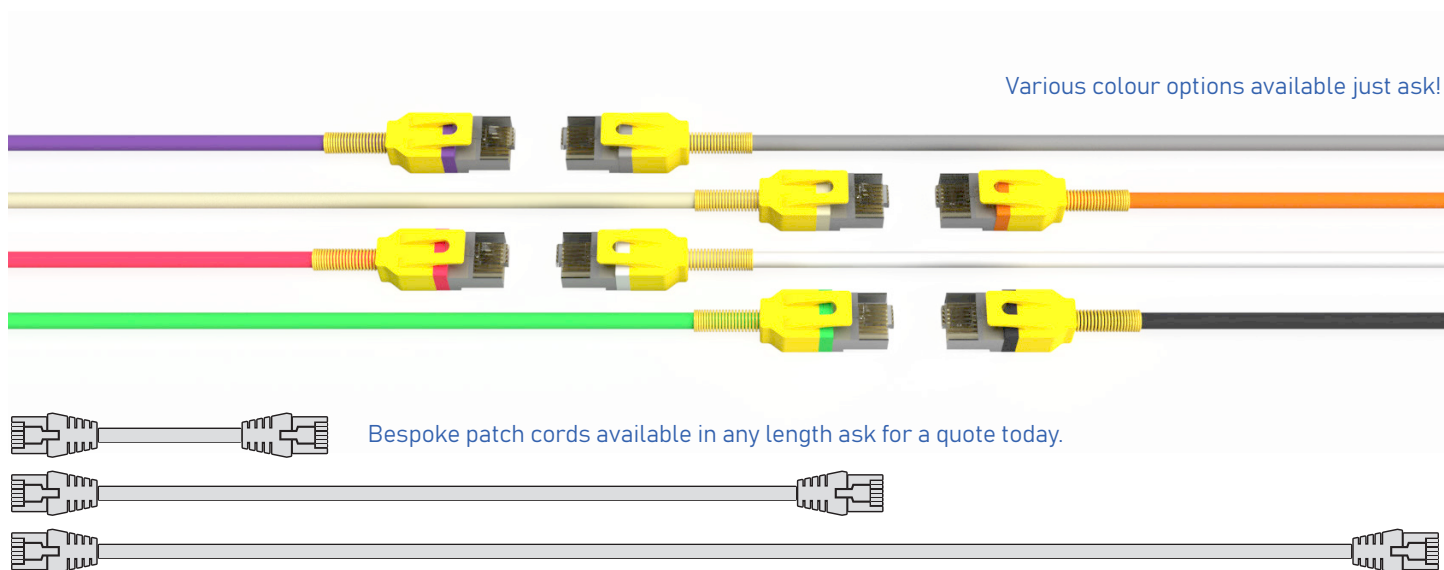

Various colour options available just ask!

Bespoke patch cords available in any length ask for a quote today.

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Construction		Colour		Material		Standard	
UUTP	U/UTP	BLK	Black	PV	PVC	-E	Extra Range
UFTP	U/FTP	GRY	Grey	LS	LSZH	-P	Platinum
		WHT	White				
		ORN	Orange				
		GRN	Green				
		BLU	Blue				
		RED	Red				
		PRL	Purple				
⬆		⬆		⬆		⬆	
UFTP	C6A	BLK	20	LS	SP	-P	
	⬇		⬇		⬇		⬇
Cat 6A	C6A	3m	3	Flat	F	Outdoor	OD
		5m	5	Angled Boot	A		
		10m	10	Locked	L		
		20m	20	Light	D		
				Micro size	M		
				Anti-Rodent	R		
				Anti-Rodent Micro	RM		
				Self-Tracing	S		
				Micro Self-Tracing	MS		
				Tangle-Free	T		
				Ultra-Flat	U		
				Retractable	RT		
				Spring Protected	SP		
Category		Length		Additional*		Outdoor**	

*Leave blank if no extra detail. **Leave blank if indoor.

Example Part Number	
Description	Part Number
Cat 6A U/FTP Spring-Protected Strain Relief 20m LSZH Patch Cord - Platinum	UFTPC6ABLK20LSSP-P

To Order

To place an order, use the contact details below.