

Copper Structured Cabling

Cat 6 Patch Cord - U/FTP Vermin-Resistant Armor

Product Description

Briticom® U/FTP Vermin-Resistant Armor Patch Cable is designed to use in harsh environment where rats and other rodents may potentially damage the cables. It also has anti-crush and electrical interference resistance for outdoor use.

Designed and manufactured to meet and exceed the ISO, CENELEC and TIA standards, including ANSI/TIA-568-C.2 Standard of 2009 and ANSI/TIA-568.0-D Standard of 2017.

Features & Benefits

- U/FTP 26 AWG stranded cable
- Waterproof
- UV resistant
- ANSI/TIA-568-C.2 Standard of 2009
- ANSI/TIA-568.0-D Standard of 2017
- Available in 0.3-50m length (7.8mm OD)
- Steel armoured, PE inner
- Fluke DSX 8000 Channel Tested
- Available in regular or micro
- Natural stainless steel colour

Applications

- Data centres
- Smart home
- Outdoors
- Harsh environments


Technical Specifications

Outside Diameter	7.8mm regular / 4.9mm micro
Usage	Indoor and outdoor use
Bandwidth	250MHz
Sheath	Steel armoured+inner PE
PC Rating	94-V2; 94-V0
Construction	STP
AWG	26 AWG / 32 AWG micro
Conductor	Stranded Copper
Frequency	2.5Gbps
Plug	RJ45 Plug
Certification	UL, Reach, CE, ISO9001, RoHS
Length	0.3m-50m regular / 0.3m-20m micro
Test Limit	Fluke DSX-8000 Channel Test @ 250Mhz
Boot Type	Assembled boot
Contacts	Brass, 3 prongs, 50u gold plating

To Order

Ordering information on page 2.





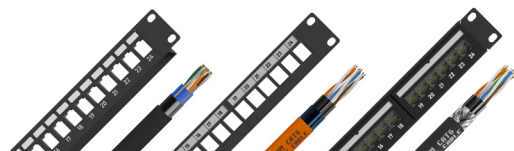

Copper Structured Cabling

Cat 6 Patch Cord - U/FTP Vermin-Resistant Armor

Various colour options available just ask!

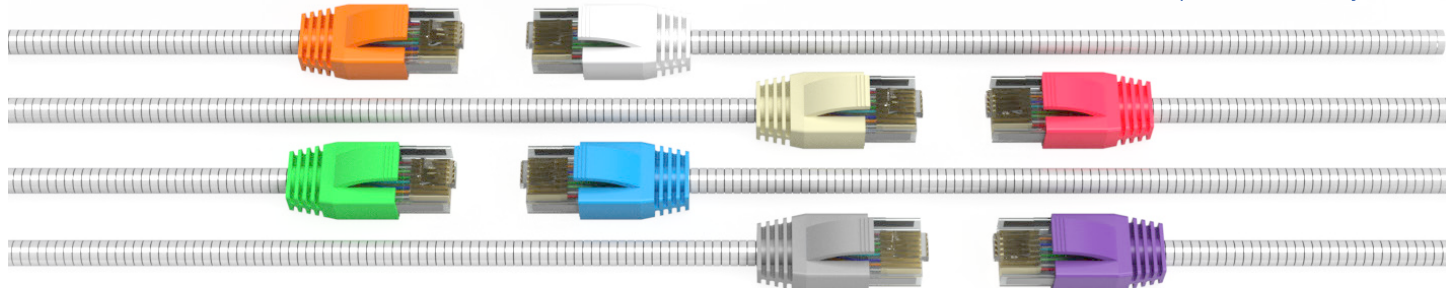

Bespoke patch cords available in any length ask for a quote today.

Ordering Information

Use combinations of **bold** letters and numbers to create part numbers for ordering.

Construction		Colour		Material		Standard	
UUTP	U/UTP	BLK	Black	PV	PVC	-E	Extra Range
SFTP	S/FTP	GRY	Grey	LS	LSZH	-P	Platinum
UFTP	U/FTP	WHT	White				
		ORN	Orange				
		GRN	Green				
		BLU	Blue				
		RED	Red				
		PRL	Purple				
		NAT	Natural				
▲		▲		▲		▲	
UFTP	C6	PRL	30	PV	R	-P	OD
▼		▼		▼		▼	
Cat 5E	C5E	0.3m	0.3	Flat	F	Outdoor	OD
Cat 6	C6	3m	3	Angled Boot	A		
Cat 6A	C6A	5m	5	Locked	L		
Cat 7	C7	10m	10	Light	D		
Cat 8	C8	20m	20	Micro size	M		
		30m	30	Anti-Rodent	R		
		50m	50	Anti-Rodent Micro	RM		
				Self-Tracing	S		
				Micro Self-Tracing	MS		
				Tangle-Free	T		
				Ultra-Flat	U		
				Retractable	RT		
Category		Length		Additional*		Outdoor**	

*Leave blank if no extra detail. **Leave blank if indoor.

Example Part Number	
Description	Part Number
Cat 6 U/FTP Armoured Anti-Rodent Patch Cord Stainless Steel 30m PVC - Platinum - Outdoor	UFTPC6PRL30PVR-POD

To Order

To place an order, use the contact details below.