


BRITICOM

British Pride, Global Power



Copper Structured Cabling

Cat 6 UTP 22.5*45 Euro Moulded Module

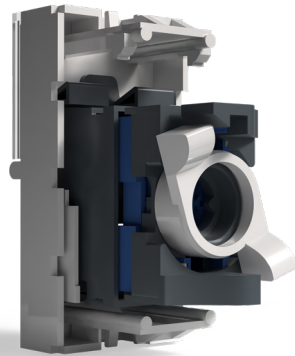

Product Description

Briticom™ Category 6 Unshielded UTP Moulded Euro module come as compact designed Keystone jacks in a module. 180° tool-free use allow a very friendly and very easy-quick installation for professionals. These Euro Modules deliver reach & exceed Category 6 Class performances supporting all applications detailed and proposed within the standards. The superior performance of these jacks is 3P Channel Verified.

Features & Benefits

- Full category 6 performance 2.5Gbps
- 360° screening
- Tool-Free
- 25-year warranty
- Individually packaged in boxes of 50 pieces
- ANSI/TIA-568-C.2D
- Automatic shuttered windows
- Labels on each port


Applications

- Data centres and Telecommunication networks
- LAN and home applications
- CATV – Cable television and CCTV
- Call centres, offices, banks

To Order

Ordering information on page 2.



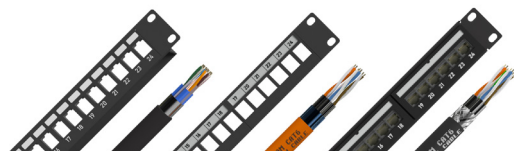

Copper Structured Cabling

Cat 6 UTP 22.5*45 Euro Moulded Module

Technical Specifications

Specifications	ISO/IEC 11801 2nd edition:2002 EN50173:2007 ANSI/TIA/EIA 568 DB.2
Wiring Specs	T568A and T568B
Dimensions	16.3mm(W) × 38mm (D) × 21mm (H)
Installation Recommendation	Suits all type of RJ45 face-plates and empty RJ45 patch panels or equipment
RJ45 Jack	Min life 750 insertions
RJ45 Jack	50um gold plated contact pins
NEXT at 500MHz	Category 6 39.1dB @250MHz (power sum)
EL FEXT at 500MHz	Category 6 27.0dB @250MHz (power sum)
Storage Temperature Range	□40 to +70□ (power sum)
Operational Temperature Range	10 to +60□ (power sum)
Jack Housing	Zinc die-cast alloy fully-shielded
Front Frame (mm)	80 × 80 or 80 × 125
Empty Module (mm)	22.5 × 45
Insertion Force	30N Max (IEC 60603-7-5)
Rear Support	Plastic UL94 V0
Colour	White
White Lable Space	YES
Dust Cover	YES
Number of Ports	1 ~ 2 (80 × 80) mm or 1 ~ 4 (80 × 125) mm
Outlet Direction	Flat / Angled

Ordering Information

Use combinations of bold letters and numbers to create part numbers for ordering.

Style		Type		Category		Size		Material	
EU	EU	S	Shuttered	5E	CAT 5E	22.5x45	22.5mm x 45mm	P	Platinum
		N	Non Shuttered	6	CAT 6	45X45	45mm x 45mm		
				6A	CAT 6A				
▲		▲		▲		▲		▲	
EU	F	S	U	6	M	22.5X45	W	P	01
	▼		▼		▼		▼		▼
Flat	F	UTP	U	Module	M	White	W	Model 01	01
Angled	A	STP	S			Black	B	Model 02	02
Shape		Shield		Type		Colour		Model	

*Leave column blank if indoor.

Example Part Number	
Description	Part Number
Briticom Flat Module Shuttered for Faceplate (22.5mm x 45mm), with 1 x Cat6 UTP Tool Free Keystone Jack	EUFSU6M22.5X45W-P01

To Order

To place an order, use the contact details below.